

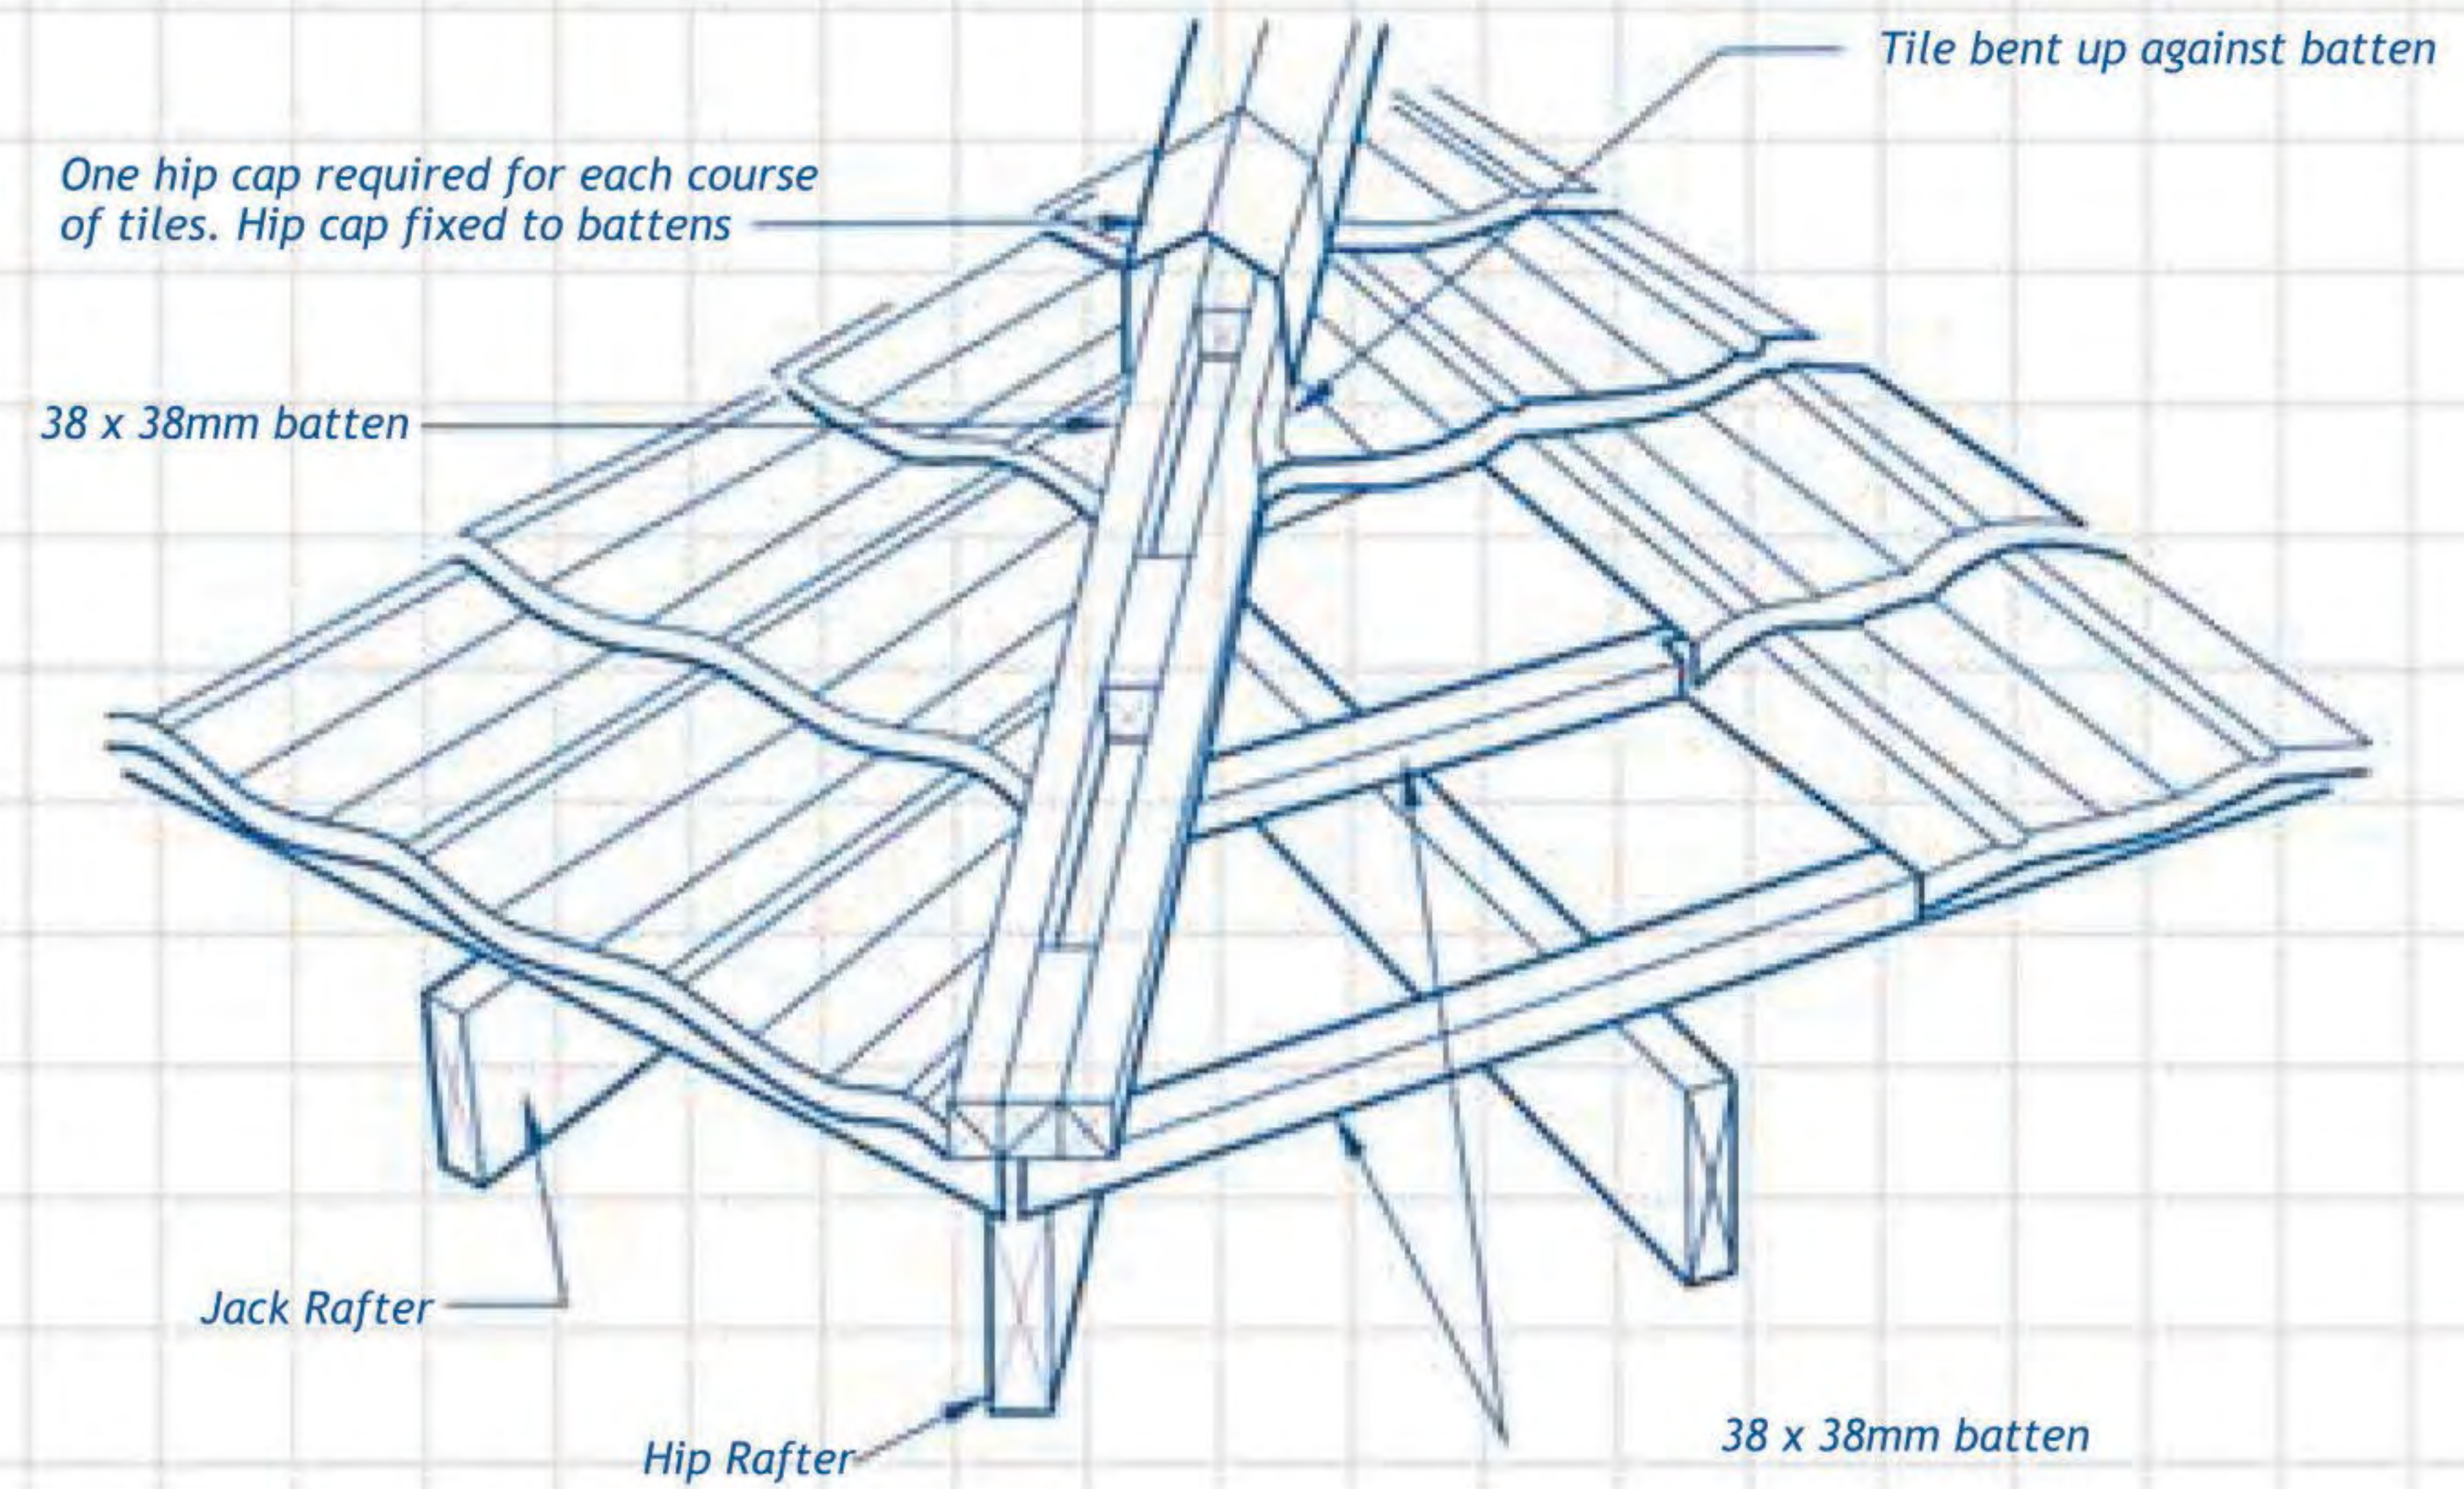



1. Hip caps are fitted starting from the bottom of the hip.
2. Hip caps must be laid with the back (deepest end) of the cap fitted against the front end of the tiles (the nose) in the course above.
3. Caps are tapered to ensure a snug fit of

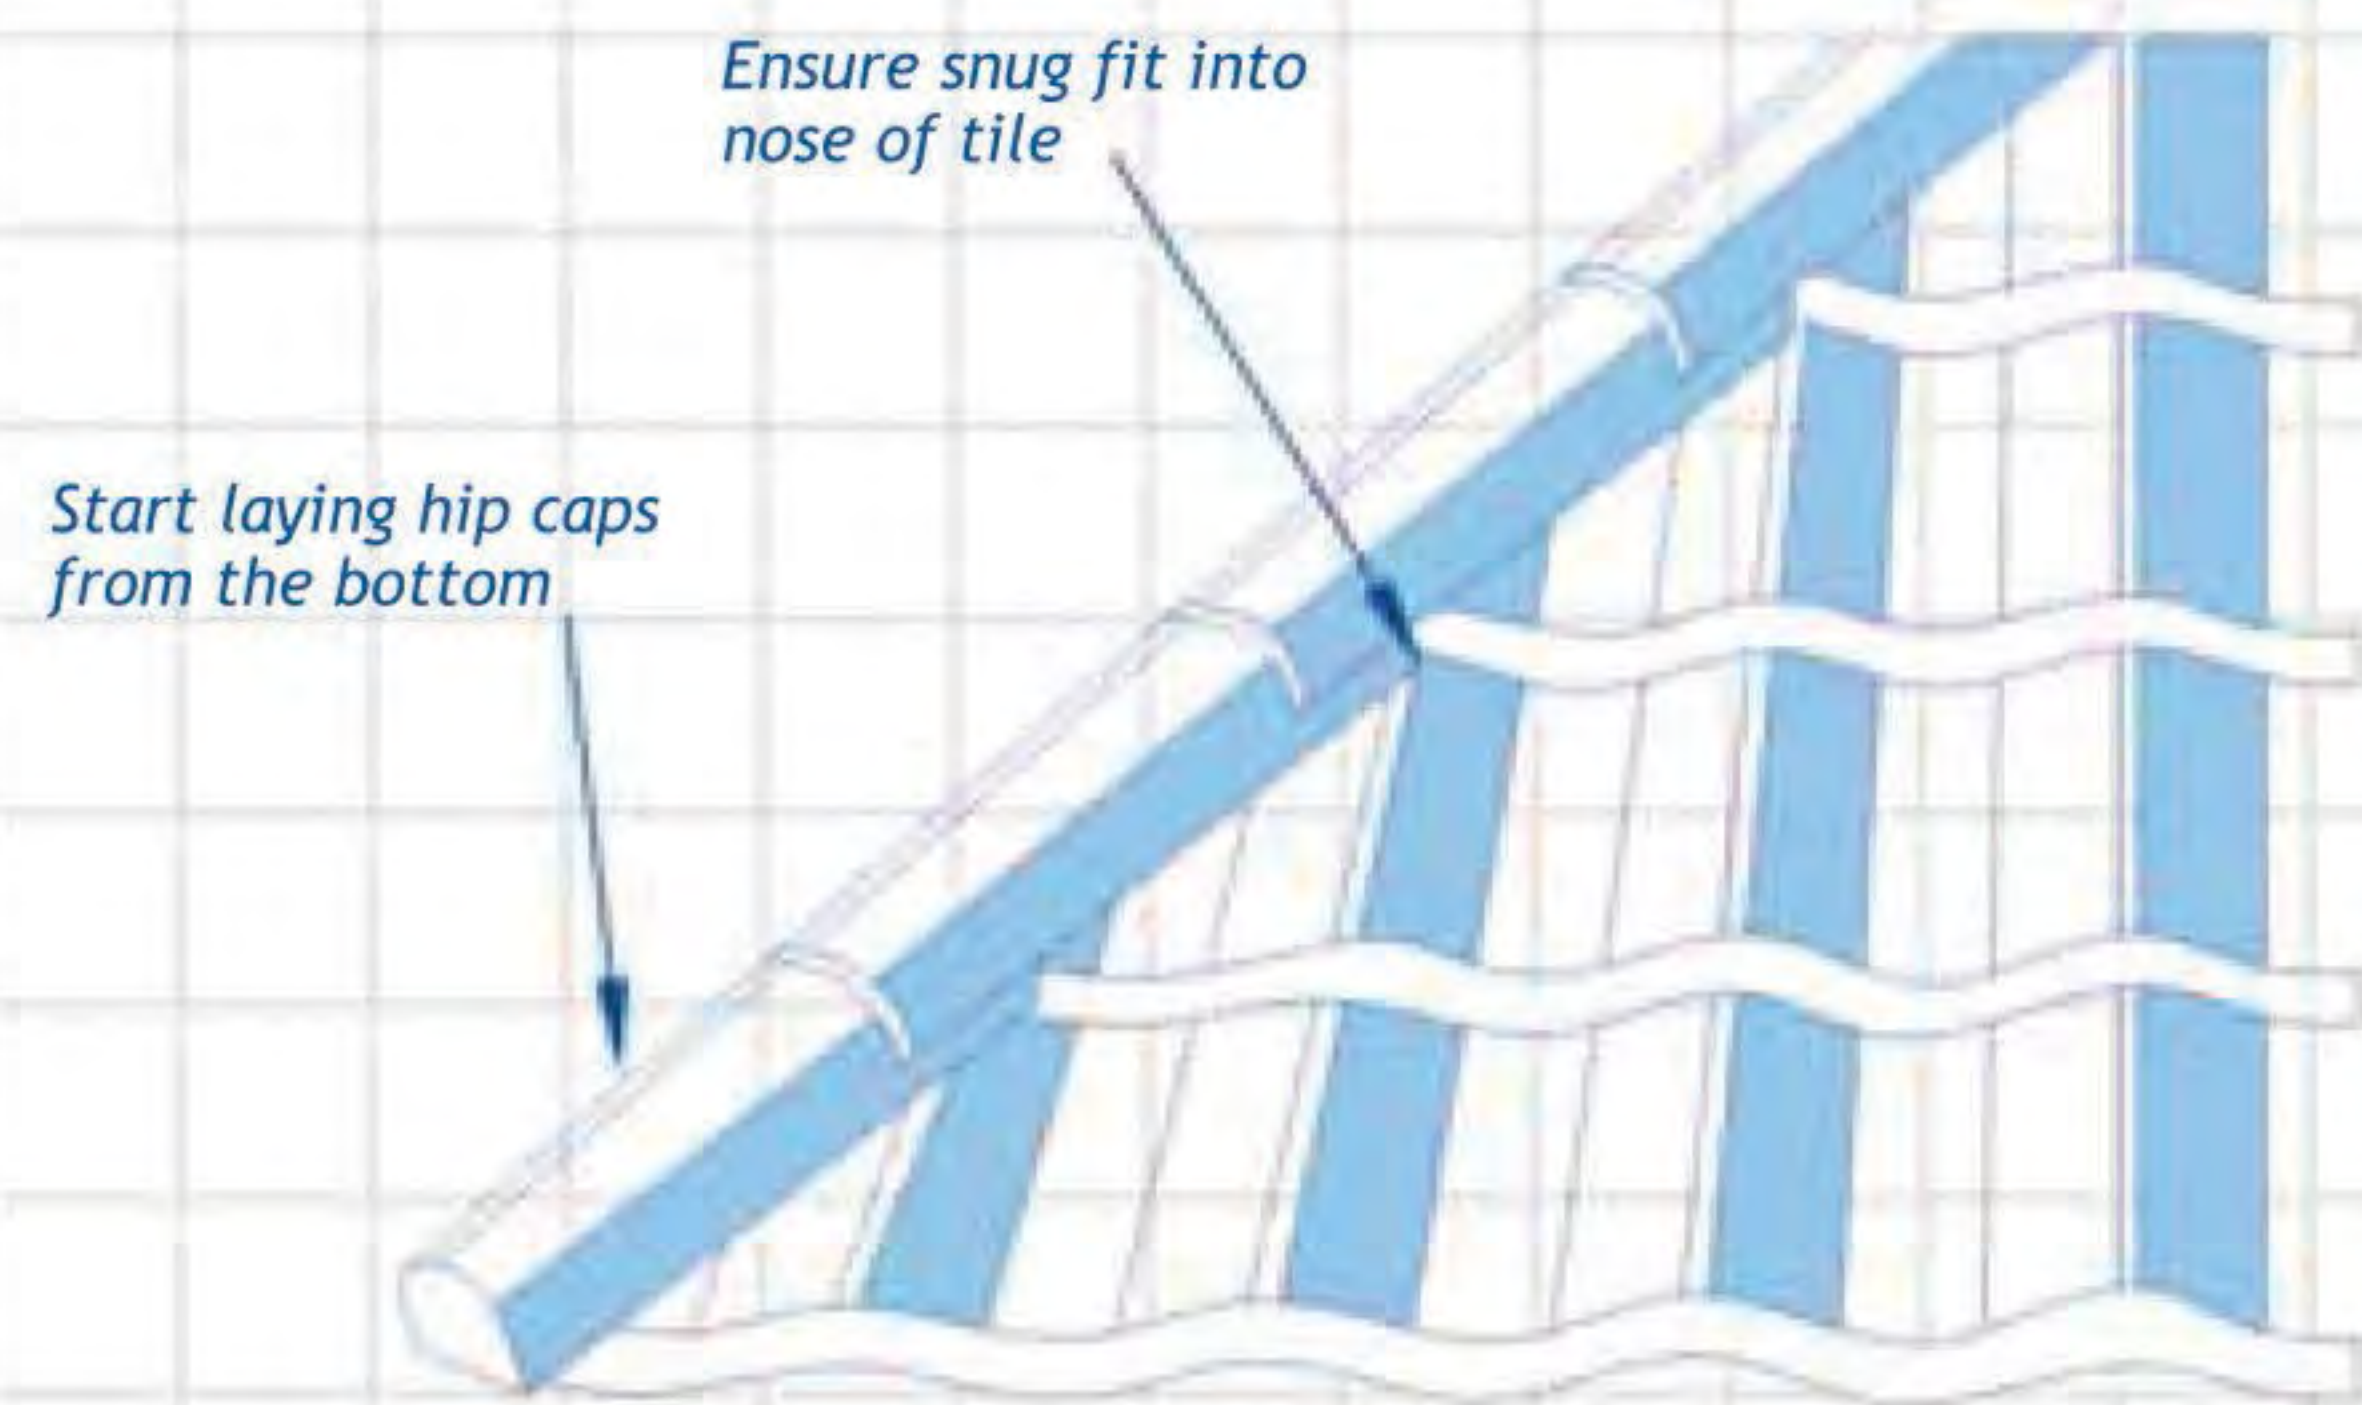

Square Hip Cap

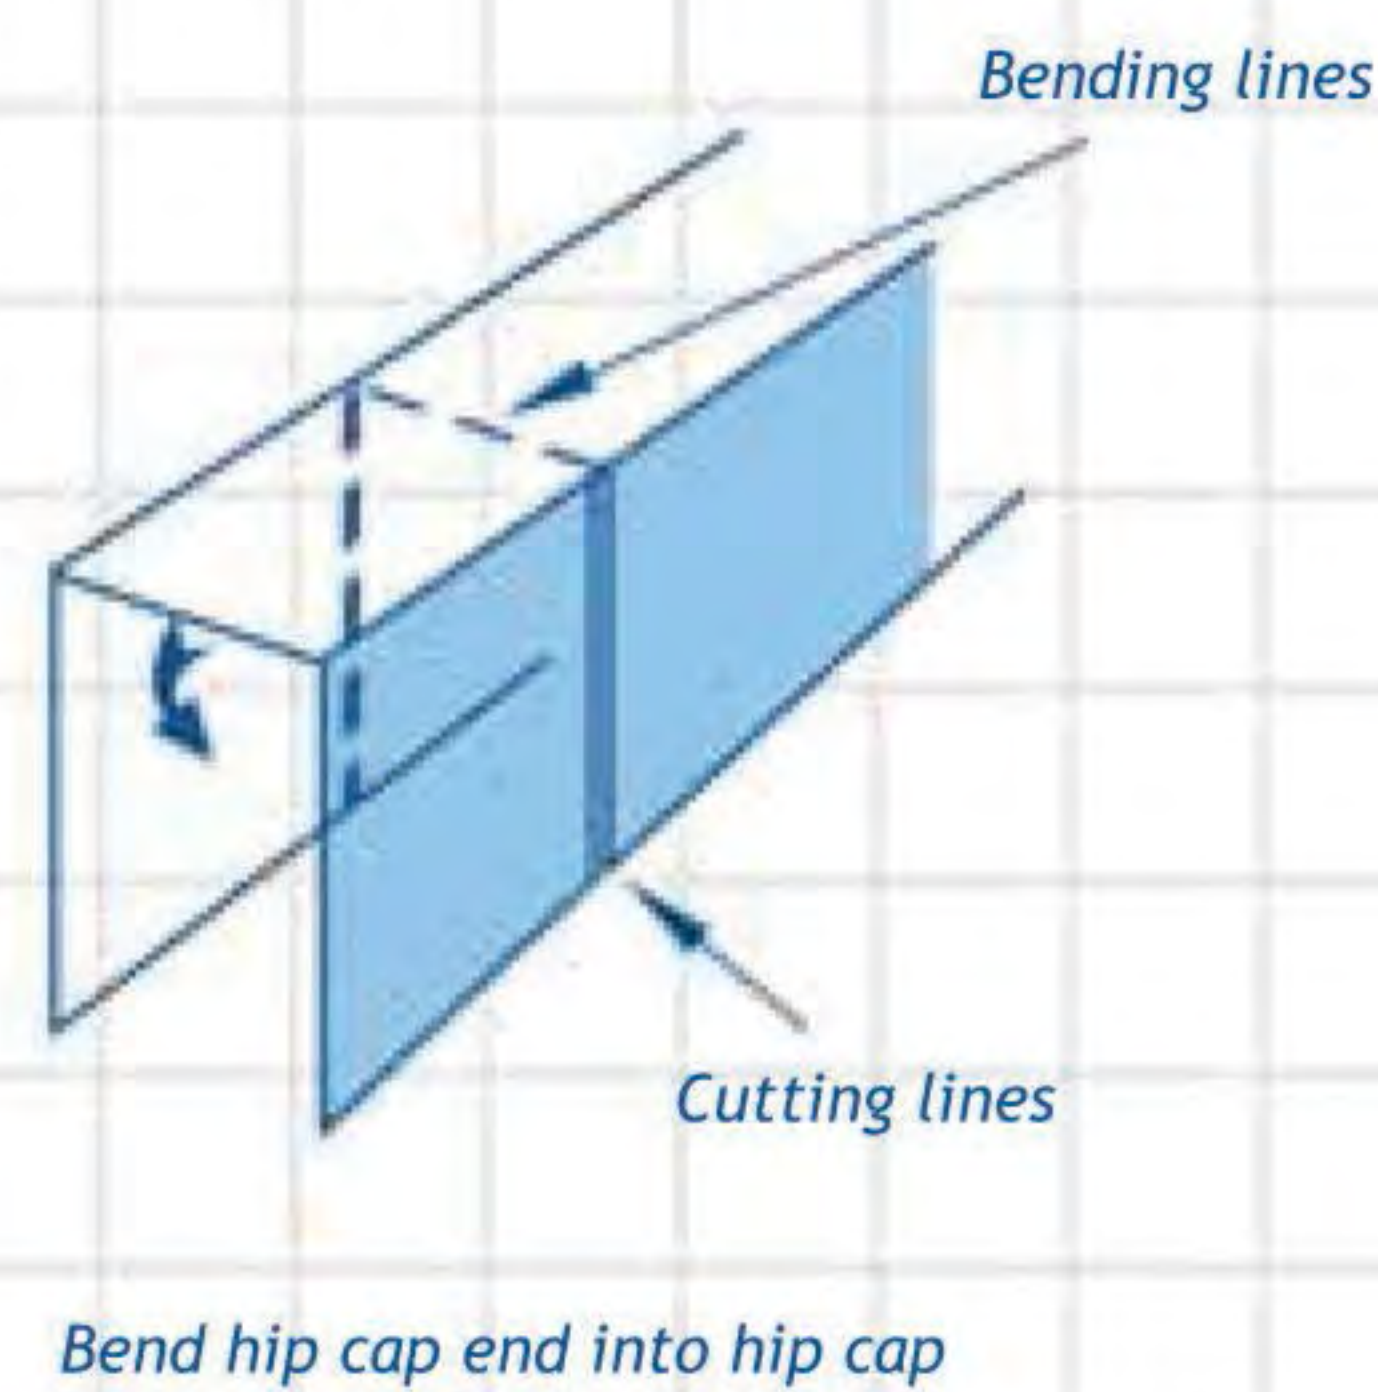

Angle Hip Cap

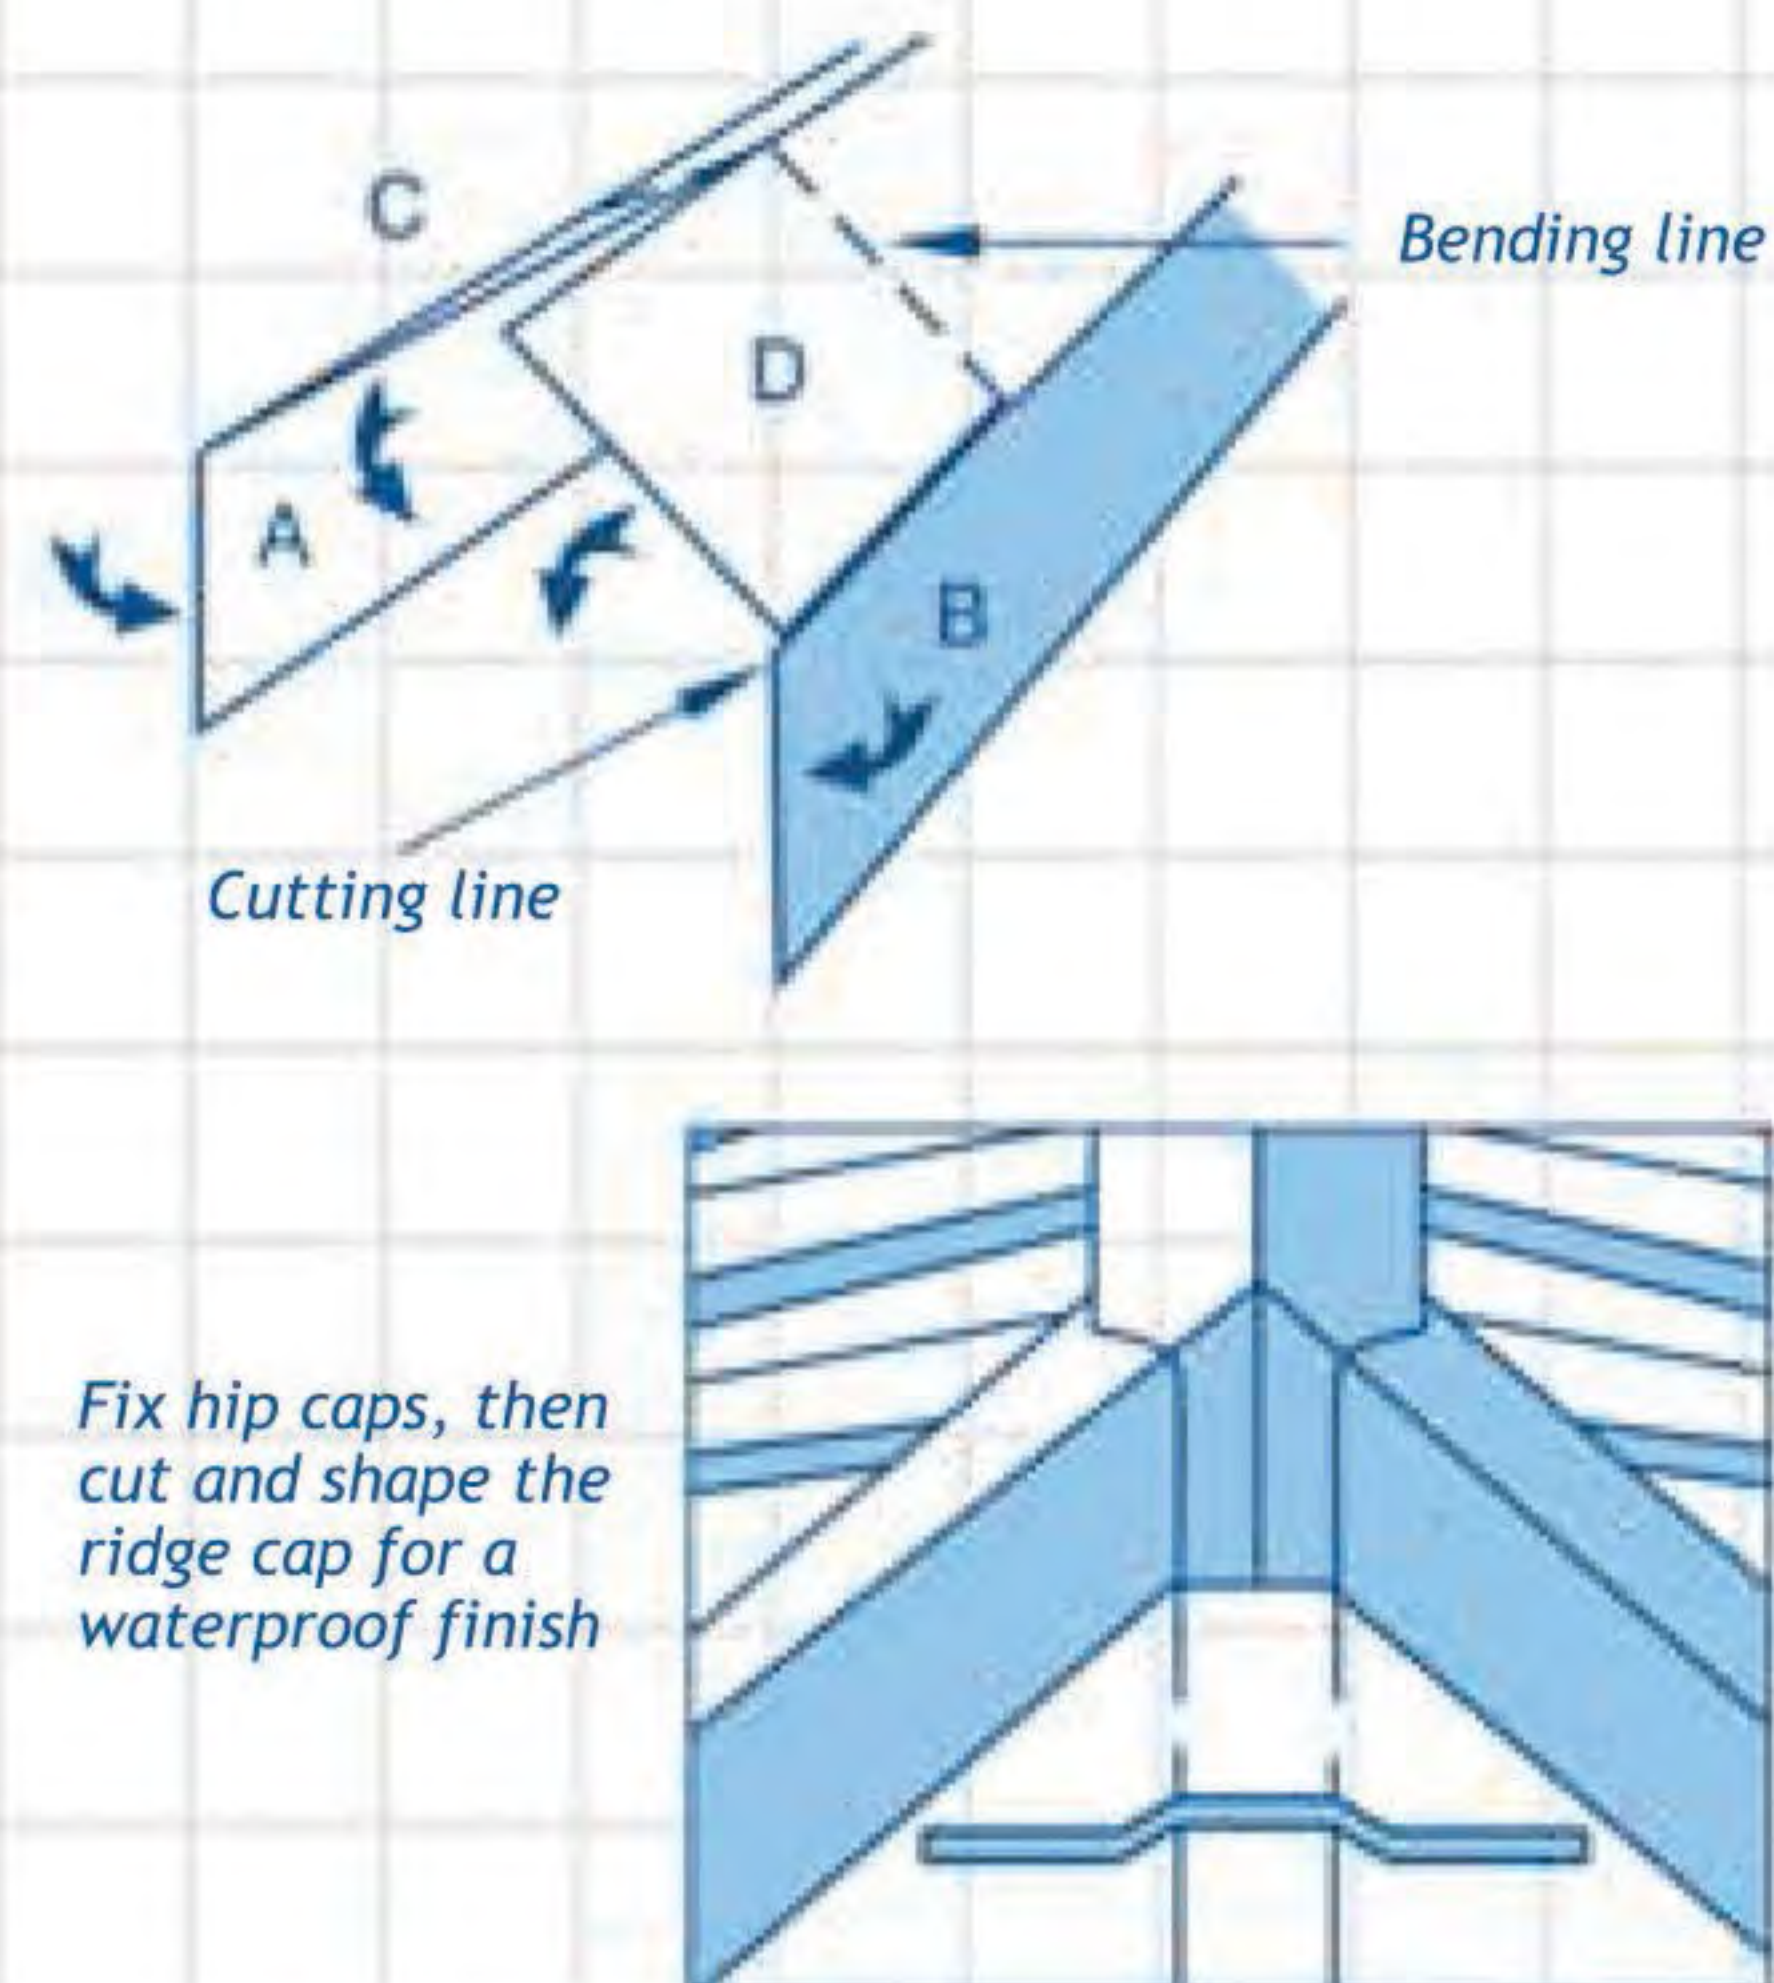

Cutting tile flanges before bending up

